

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau(43) International Publication Date  
22 January 2004 (22.01.2004)


PCT

(10) International Publication Number  
WO 2004/007337 A1

- (51) International Patent Classification<sup>7</sup>: B66F 9/065, (71) Applicant and  
B66C 13/48, E02F 3/34 // 9/20, 3/43 (72) Inventor: SEGERLJUNG, Max [SE/SE]; Penglund 112,  
S-911 94 Vännäs (SE).
- (21) International Application Number: PCT/SE2003/001074 (72) Inventor: DAHLSTRÖM, Kurt (deceased).
- (22) International Filing Date: 23 June 2003 (23.06.2003) (74) Agents: OLSSON, Jan et al.; Bjerkéns Patentbyrå KB,  
Box 1274, S-801 37 Gävle (SE).
- (25) Filing Language: Swedish (81) Designated States (*national*): AE, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,  
RU, SC, SD, SE, SG, SK (utility model), SK, SL, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.
- (26) Publication Language: English
- (30) Priority Data: 0202202-8 15 July 2002 (15.07.2002) SE (84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: A DEVICE IN A VEHICLE ADAPTED TO HANDLE LOADS

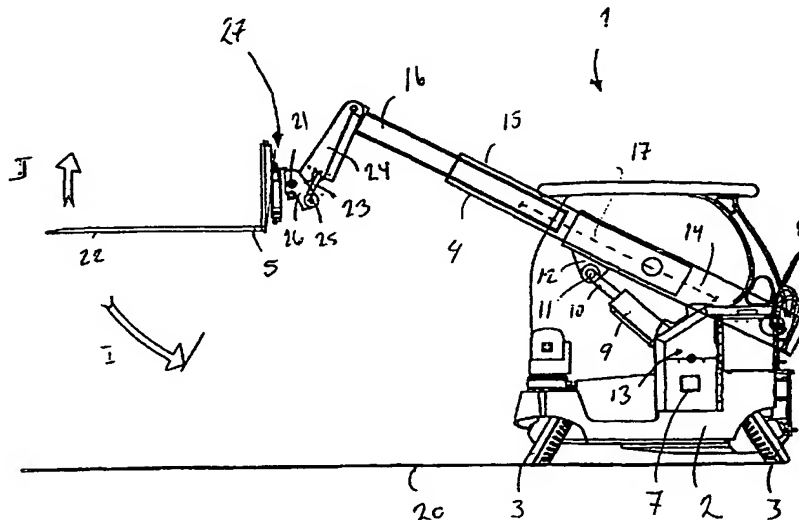

(57) Abstract: The invention relates to a device for a vehicle (1) intended for handling loads, such as an industrial truck, comprising a movable arm (4) connected to the vehicle, to which a tool (5) intended to carry a load (L) is connected, and an arrangement (7) to control movements of said tool. The arm is pivotably mounted on the vehicle about a first substantially horizontal axis (8). The device comprises a member (9) for pivoting the arm relative to a chassis (2) of the vehicle. The tool (5) is displaceably arranged relative to the chassis (2) of the vehicle in the direction of the arm's (4) main longitudinal extension. The device comprises means (17) for displacing the tool. The control arrangement (7) is designed to co-ordinate the pivoting member's (9) pivoting of the arm and the displacement means' (17) displacement of the tool so as to achieve a movement of the load carried by the tool (5) along an optionally placed curve having an optional appearance in relation to the vehicle in the vertical plane.